

GRUPPO INCASSO PLUS PRO

Version
Plus - Built-in - 80 cm - Inox -
950 m3/h

Collection
Professional

EAN code
8034122367545



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Electronic control
Remote control (optional)
Professional Baffle Filters
Dimmable lighting
Dynamic Light (2700K - 5600K)
Emptied liquid collector
Dialogue system with auto mode

OPTIONAL ACCESSORIES

105080053
Remote control

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
80 cm
Finishing
Scotch brite stainless steel (AISI 304)
Motor
1000 m³/h
Type of control
Electronic control
Speed settings
4
Lighting
Led 2x1,8 W - 2700 K / 5600 K
Minimum distance
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND
VOLUMES


Gross weight
16 kg
Net weight
13 kg
Volumes
0.17 m³
Packaging size
Length
950 mm
Height
440 mm
Depth
395 mm

CONSUMPTION AND
CONNECTION FEATURES

Maximum consumption
320 W
Voltage
220-240V
Frequency
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity
860 m³/h
I.E.C. 61591
Maximum noise level
69 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
600 Pa
Max. motor power
260 W
ENERGY CLASS
A



GRUPPO INCASSO PLUS PRO

Version
Plus - Built-in - 80 cm - Inox -
950 m3/h


Collection
Professional

EAN code
8034122367545

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	53	58	64	69
Capacity (m3/h) I.E.C.61591	350	470	620	860
Maximum pressure (Pa)	500	540	560	600
Motor Power (W)	185	215	240	260
Air outlet	150	150	150	150

CAPACITY / PRESSURE

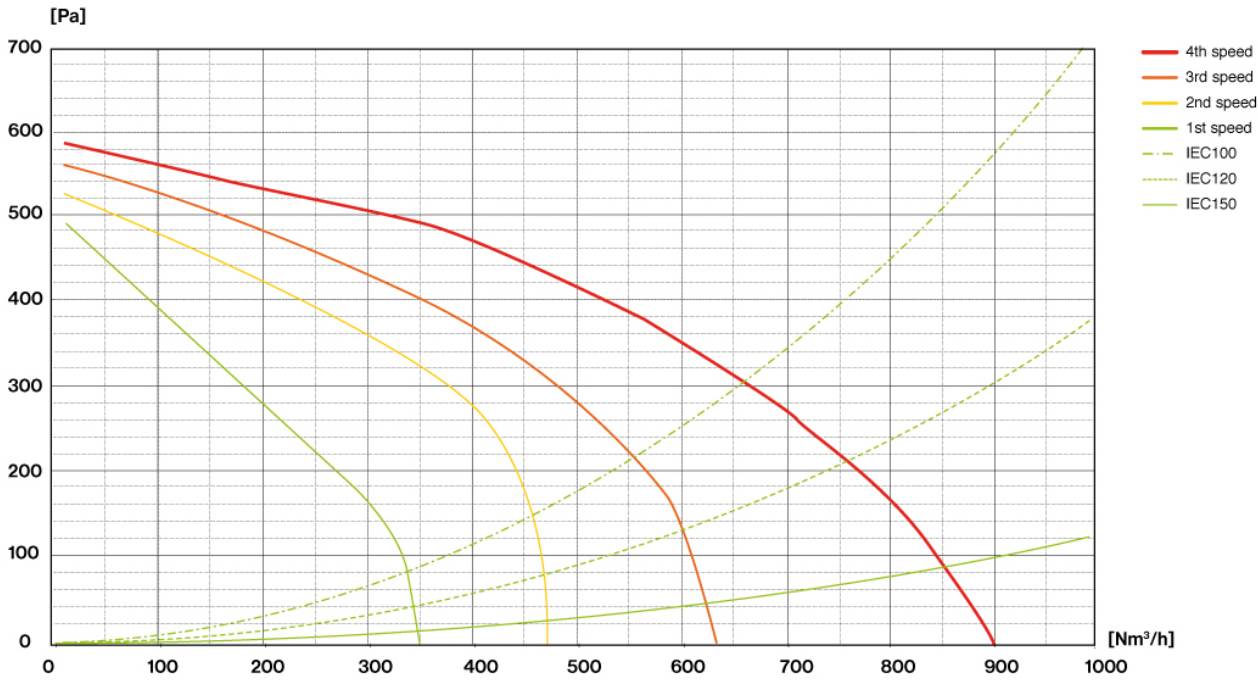


GRUPPO INCASSO PLUS PRO

Version
Plus - Built-in - 80 cm - Inox -
950 m3/h

Collection
Professional

EAN code
8034122367545

ENERGY LABEL

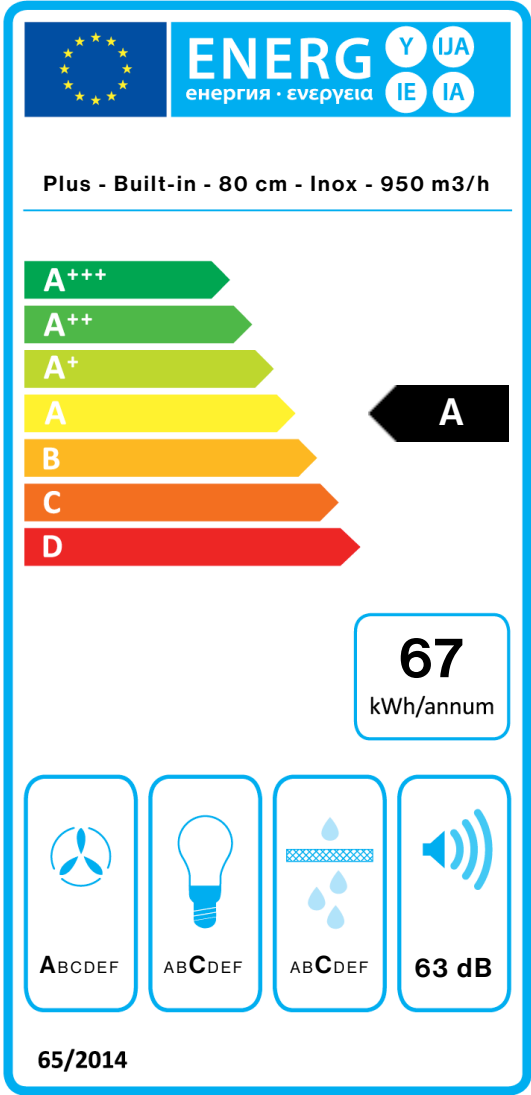

PF		
S	Falmec Spa	
M	Plus - Built-in - 80 cm - Inox - 950 m3/h	
AEC	67,3	kWh/a
EEC	A	
FDE	29,3	
FDEC	A	
LE	18,0	
LEC	C	
GFE	74,0	
GFEC	C	
Qmin	350,0	m³/h
Qmax	620,0	m³/h
Qboost	860,0	m³/h
SPEmin	53	dBa
SPEmax	63	dBa
SPEboost	70	dBa
PO	-	W
PS	0,28	W
PI		
F	0.9	
EEL	53,8	
Qbep	473,0	m³/h
Pbep	435	Pa
Qboost	860,0	m³/h
Wbep	195,0	W
WL	4,50	W
Emiddle	81	lex
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.